

CÂBLES EN ACIER ANTIGIRATOIRES


18X7+1 (FC)

EN 12385-4

DIAM. CABLE	DIAM. ALAM.	SECTION CABLE	POIDS	CRM/MBL	CRM/MBL
MM.	MM	MM ²	KGS/MT	1960 N/MM ² KN	1960 N/MM ² KG.
6	0,4	20	0,138	23,1	2.355
7	0,45	23	0,187	31,5	3.211
8	0,5	26	0,244	41,1	4.190
9	0,56	33	0,309	52,1	5.311
10	0,63	41	0,382	64,3	6.555
11	0,69	49	0,462	77,8	7.931
12	0,75	59	0,55	92,6	9.439
13	0,83	69	0,646	109	11.111
14	0,89	80	0,749	126	12.844
16	1,01	105	0,978	165	16.820
18	1,2	142	1,24	208	21.203
20	1,3	167	1,53	257	26.198
22	1,45	207	1,85	311	31.702
24	1,6	253	2,2	370	37.717
26	1,7	285	2,58	435	44.343
28	1,8	320	2,99	504	51.376

Disponibles:

TORSION LANG, CROSS TORSION

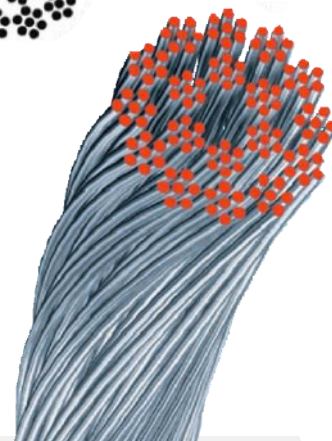

CÂBLES EN ACIER ANTIGIRATOIRES



19X7+0 (SC)

EN 12385-4

DIAM. CABLE	DIAM. ALAM.	SECTION CABLE	POIDS	CRM/MBL	CRM/MBL
MM.	MM	MM ²	KGS/MT	1960 N/MM ² KN	1960 N/MM ² KG.
6	0,4	16	0,144	23,1	2.355
7	0,45	22	0,196	31,5	3.211
8	0,5	29	0,257	41,1	4.190
9	0,56	37	0,325	52,1	5.311
10	0,63	46	0,401	64,3	6.555
11	0,69	55	0,485	77,8	7.931
12	0,75	66	0,577	92,6	9.439
13	0,83	77	0,678	109	11.111
14	0,89	90	0,786	126	12.844
16	1,01	117	1,03	165	16.820
18	1,14	146	1,3	208	21.203
20	1,28	183	1,6	257	26.198
22	1,4	218	1,94	311	31.702
24	1,53	261	2,31	370	37.717
26	1,65	303	2,71	435	44.343
28	1,77	350	3,14	504	51.376

Disponibles:

TORSION LANG, CROSS TORSION

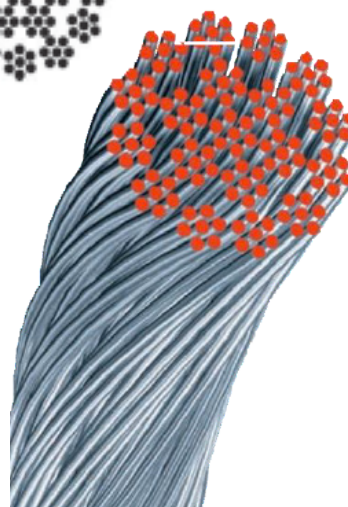


CÂBLES EN ACIER ANTIGIRATOIRES

35X7+0 (W)

EN 12385-4


DIAM. CABLE	DIAM. ALAM.	SECTION CABLE	POIDS	CRM/MBL	CRM/MBL
MM.	MM	MM ²	KGS/MT	1960 N/MM ² KN	1960 N/MM ² KG.
12	0,58	79	0,654	109	11.111
14	0,68	92	0,89	148	15.087
16	0,8	123	1,16	194	19.776
17	0,84	136	1,31	219	22.277
18	0,88	150	1,47	245	24.975
19	0,94	171	1,64	273	27.783
20	0,97	185	1,82	302	30.785
21	1,02	205	2,01	333	33.945
22	1,07	225	2,2	366	37.309
23	1,14	251	2,4	400	40.775
24	1,17	270	2,62	435	44.343
25	1,22	290	2,84	472	48.160
26	1,27	317	3,07	511	52.090
28	1,37	368	3,56	593	60.449
32	1,58	486	4,65	774	78.899
36	1,76	607	5,88	980	99.898
38	1,85	670	6,56	1090	111.111
40	1,97	752	7,26	1210	123.344

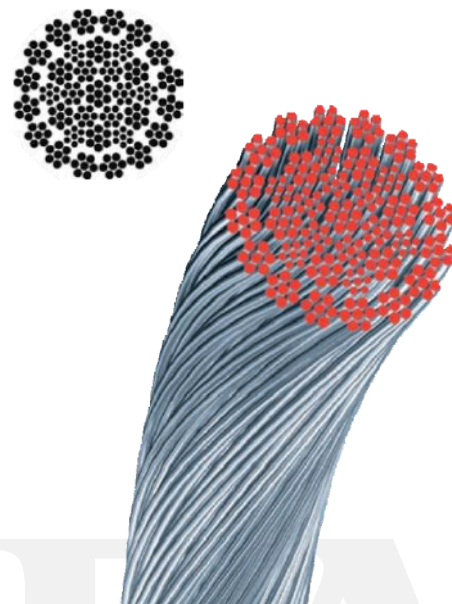

CÂBLES EN ACIER GALVANISÉS POUR APPAREILS DE LEVAGE

DIAM. CABLE	DIAM. ALAM.	POIDS	CRM/MBL	CRM/MBL
MM.	MM	KGS/MT	1960 N/MM ² KN	1960 N/MM ² KG.
8.3	0.66	0.27	49.20	5000
11.3	0.73	0.52	98.20	10000
16.3	0.93	1.10	202.50	20600


CABLE PLASTIQUE (PVC, POLYPROPYLENE)



6X7+1 (FC)



6X19+1



7X7+0



7X19+0

Couleurs disponibles: Rouge, verre, blanc, bleu, orange, brun, noir et vert.