
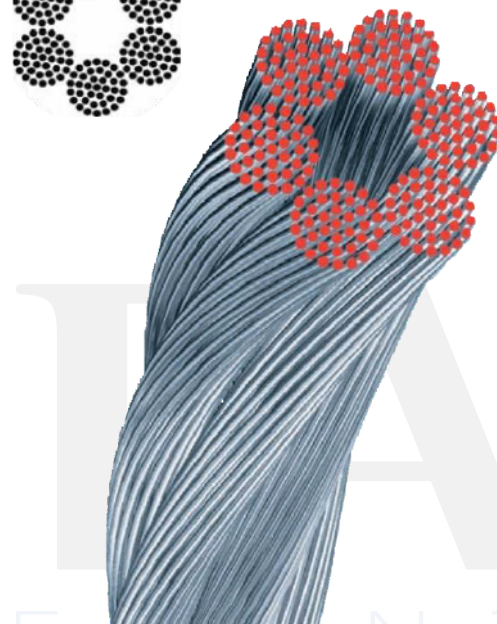


CÂBLES EN ACIER STANDARDS

6X37+1 (FC)

EN 12385-4

DIAM. CABLE	DIAM. ALAM.	SECTION CABLE	POIDS	CRM/MBL	CRM/MBL
MM.	MM	MM ²	KGS/MT	1770 N/MM ² KN	1770 N/MM ² KG.
8	0.35	30	0.221	33.40	3400
10	0.45	38	0.346	52.20	5310
12	0.54	54	0.498	75.10	7640
14	0.63	71	0.678	102.00	10400
16	0.73	95	0.886	134.00	13600
18	0.81	118	1.12	169.00	17200
20	0.91	150	1.38	209.00	21200
22	1.01	182	1.67	253.00	25700
24	1.11	214	1.99	301.00	30600
26	1.19	252	2.34	353.00	35900
28	1.29	289	2.71	409.00	41600
30	1.37	334	3.00	470.00	47900
32	1.45	376	3.54	534.00	54300
34	1.55	429	3.82	604.00	61600
36	1.66	480	4.48	676.00	68800
38	1.73	532	4.99	754.00	77000
40	1.82	590	5.54	835.00	84900
42	1.93	650	6.09	921.00	93950
44	2.02	710	6.70	1010.00	103000
46	2.11	777	7.12	1104.00	112600
48	2.18	844	7.97	1200.00	122000



Plus de 3000 tonnes de câbles en stock permanent.

